

Ecophon® Super G™

DESIGNER SERIES

High Density Fiberglass Ceilings

Features & Benefits:

- Unique impact-resistant finished surface.
- Part of an impact-resistant system design.
- Superior sound absorption.
- Available in two colors (see pg. 16).
- Moisture resistant.
- Recommended by Swedish Asthma and Allergy Association.

Applications:

- Multi-Purpose Rooms
- Gymnasiums
- Public Corridors

Relative Installed Cost:

\$\$\$\$



LEED 2009: NC, CI, & Schools							LEED 2009 for Schools	
Optimize Energy	Building Reuse	Waste Management	Recycled Content	Regional Materials	Renewable Materials	Daylight & Views	Acoustic Performance	Low-emitting
◆	◆	◆	◆				◆	

Ecophon® Super G™

DESIGNER SERIES

High Density Fiberglass Ceilings



Ecophon®
SAINT-GOBAIN


DESIGNER SERIES

Attributes:

ITEM NUMBER	NOMINAL SIZE (Inches)	EDGE DETAIL	NRC	CAC	LR	RECYCLED CONTENT %	ISO SOUND ABSORPTION CLASS
3559 2586	24 x 24 x 1-3/8	Trim	0.90	30	0.78	75	A
3559 2585	24 x 48 x 1-3/8	Trim	0.90	30	0.78	75	A

ASTM E 1264 Classification: Type XII, Form 2, Fire Class A

Acoustics:

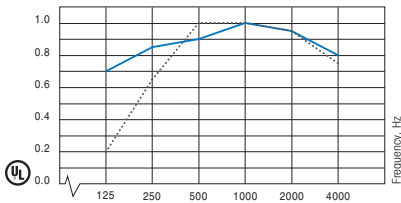

SOUND ABSORPTION: Test results according to ASTM C 423.
o.d.s = overall depth of system


— Ecophon® Super G™ 35mm, 400 mm o.d.s.
..... Ecophon® Super G™ 35 mm, 50 mm o.d.s.

UNIT SIZE TESTED (Inches)	SOUND ABSORPTION COEFFICIENTS – E-400 MOUNTING					
	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
ECOPHON® SUPER G™ A						
24 x 24 x 1-3/8	0.69	0.85	0.90	0.99	0.95	0.82



SECTION OF SUPER G™ SYSTEM

Edge Detail:



TRIM EDGE
(Square) 1/4" Grid

Product Features at a Glance:

- COLOR AVAILABILITY
- HIGHLY DECORATIVE
- HIGH DURABILITY
- NOISE REDUCTION
- RESISTS SAGGING



For detailed installation instructions, visit www.certainteed.com/ceilings

CertainTeed
SAINT-GOBAIN