

Fine Fissured Customline®

PERFORMANCE SERIES MINERAL FIBER CEILING



Specification Sheet

Features & Benefits:

- Three dramatic geometric designs with discreet small scale fissure pattern.
- Choice of two edge details for design creativity.
- Crisp scoring patterns provide options for expanded design possibilities.
- Product's deep scoring complements the suspension system, masking the metal grid.
- Available in 5 colors.
- No added formaldehyde.

See reverse for additional product specifications.


Applications:

- Hospitality
- Retail
- Offices
- Education
- Healthcare
- Restaurants

Attributes:

ITEM NUMBER	NOMINAL SIZE (Inches)	EDGE DETAIL	UL CLASSIFIED		LR	RECYCLED CONTENT %
			NRC	CAC		
SAFETONE® CLASS A						
FFCL-224	24 x 48 x 3/4	Reveal	0.60	38	0.84	36-45
FFCLN-224	24 x 48 x 3/4	Narrow Reveal	0.60	38	0.84	36-45
FFCL-448	24 x 48 x 3/4	Reveal	0.50	38	0.84	36-45
FFCLN-448	24 x 48 x 3/4	Narrow Reveal	0.50	38	0.84	36-45
FFCL-812	24 x 48 x 3/4	Reveal	0.50	38	0.84	36-45
FFCLN-812	24 x 48 x 3/4	Narrow Reveal	0.50	38	0.84	36-45
PROTECTONE® (For specific UL fire resistant time-rated assemblies)						
PFCL-224	24 x 48 x 3/4	Reveal	0.50	40	0.84	47


ASTM E 1264 Classification: Type III, Form 2, Pattern C D K

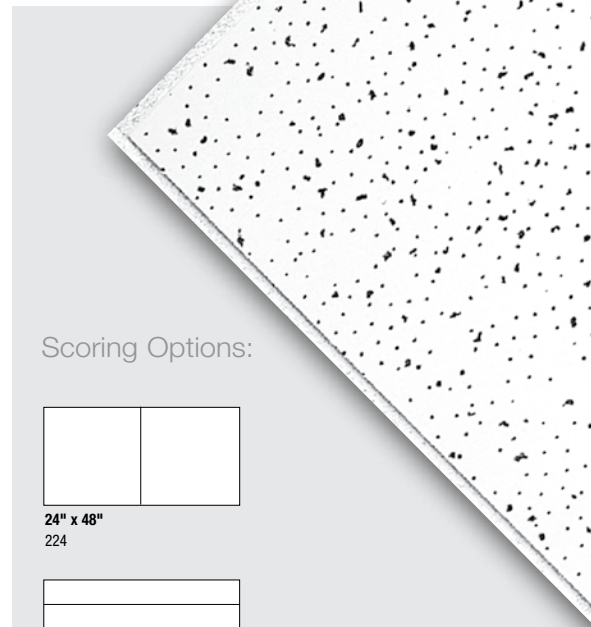


Scoring Options:



24" x 48"
224



24" x 48"
448




24" x 48"
812




BioShield™
BioShield™ treatment **included** for added mold and mildew resistance.



Edge Details:



REVEAL EDGE
(Beveled) 1/4" Grid



NARROW REVEAL EDGE
(Beveled) 1/4" Grid

Product Specification Details

Acoustical Ceilings

09 51 00

PART 2: PRODUCTS

2.1 GENERAL

Provide Acoustical Ceiling Material manufactured to meet requirements of this specification in accordance with ASTM E 1264.

2.2 MATERIALS

Acoustical Ceiling Units:

1. Type III
2. Form 2
3. Pattern [C] [D] [K]
4. Discreet non-directional fissured surface scored to simulate [two 24" x 24"] [four 6" x 48"] [eight 12" x 12"] wet-felted lay-in panels
5. Size 3/4" thick x 24" x 48"
6. Edge Detail [Reveal] [Narrow Reveal]
7. Noise Reduction Coefficient (NRC) [0.50] [0.60]
8. Ceiling Attenuation Class (CAC) [38] [40]
9. Light Reflectance Coefficient (LR) 0.84
10. Recycled Content [36-45] [47]
11. Color [White] [Beige Breeze] [Blondewood] [Silver Lining] [Wet Clay] [White Wash]
12. Flame Spread Classification (ASTM E 84, CAN/ULC-S102M) Class A
13. Underwriters Laboratories Inc. Fire Resistance (ASTM E 119, CAN/ULC-S101M) Time-Rated Assembly* [G208] [G218] [G248] [G255]
14. Manufacturer, subject to compliance with requirements of this specification, CertainTeed Ceilings
15. Product Name [Fine Fissured Customline®] [Protectone® Fine Fissured Customline®]

* Relevant to Protectone® only. Refer to UL Fire Resistant Directory for specific design information.

Distributed by:

Characteristics, properties or performance of materials or systems manufactured by CertainTeed herein described are derived from data obtained under controlled test conditions. CertainTeed makes no warranties, express or implied, as to their characteristics, properties or performance under any variations from such conditions in actual construction. CertainTeed assumes no responsibility for the effects of structural movement.

NOTICE: The information in this document is subject to change without notice. CertainTeed assumes no responsibility for any errors that may inadvertently appear in this document.

ASK ABOUT ALL OF OUR OTHER CERTAINTEED® PRODUCTS AND SYSTEMS:

ROOFING • SIDING • TRIM • WINDOWS • DECKING • RAILING • FENCE
INSULATION • GYPSUM • CEILINGS • FOUNDATIONS • PIPE

CertainTeed Corporation
P.O. Box 860
Valley Forge, PA 19482

Professional: 800-233-8990
Consumer: 800-782-8777

www.certainteed.com <http://blog.certainteed.com>

© 05/10 CertainTeed Corporation
Code No. CTC-4655