

Specification Sheet

Features & Benefits:

- Punched gypsum panel.
- European inspired design.
- Gypsum core.
- Paintable, no primer needed.
- Acoustical tissue backing.
- Sound absorbent.
- Sag resistant.
- Easy plenum access.
- Unique aesthetic appeal.
- Durable.
- Does not contain formaldehyde.

See reverse for additional product specifications.

Applications:

- Retail
- Hotels/Resorts
- Offices
- Restaurants
- Dining Halls
- Atriums
- Corridors
- Airports
- Malls
- Country Clubs
- Schools


Attributes:

ITEM NUMBER	NOMINAL SIZE (Inches)	EDGE DETAIL	NRC	CAC	LR	PERFORATED AREA	WEIGHT, LBS/SQ. FT. (kg/sq. meter)	RECYCLED CONTENT %
SAFETONE® CLASS A								
5200410316	24 x 24 x 1/2	Trim	0.80†	35†	0.71	12%	1.64 (8)	85
5200410320	24 x 24 x 1/2	Narrow Reveal	0.80†	35†	0.71	12%	1.64 (8)	85

ASTM E 1264 Classification: Type XX, Pattern A G, Fire Class A


† NRC and CAC values when used with CertainTeed CertaPro™ insulation in unfaced 3-1/2" (R-11) as an overlay above the installed ceiling panel. (Without insulation overlay: NRC=0.60, CAC=17)

Acoustics:

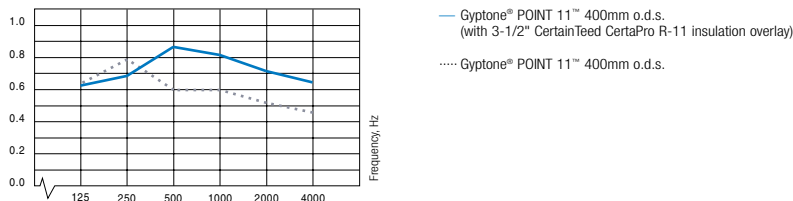


UNIT SIZE TESTED (Inches)	SOUND ABSORPTION COEFFICIENTS – E-400 MOUNTING					
	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
GYPTONE® POINT 11™ (WITH 3-1/2" CT FG OVERLAY)						
24 x 24 x 1/2	0.63	0.69	0.87	0.82	0.72	0.65
GYPTONE® POINT 11™						
24 x 24 x 1/2	0.64	0.79	0.60	0.60	0.52	0.46

Edge Details:



TRIM EDGE
(Square) 15/16" Grid



NARROW REVEAL EDGE
(Corner Bevel) 3/16" Grid



First Installation Assistance

Product Specification Details

Acoustical Ceilings

09 51 00

PART 2: PRODUCTS

2.1 GENERAL

Provide Acoustical Ceiling Material manufactured to meet requirements of this specification in accordance with ASTM E 1264.

2.2 MATERIALS

Acoustical Ceiling Units:

1. Type XX (gypsum base)
2. Form NA
3. Pattern A G
4. Gypsum board lay-in panel, smooth surface, with perforations
5. Size 1/2" thick x 24" x 24"
6. Edge Detail [Trim (Square)] [Narrow Reveal]
7. Noise Reduction Coefficient (NRC) [0.60] [0.80 with insulation overlay]
8. Ceiling Attenuation Class (CAC) [17] [35 with insulation overlay]
9. Light Reflectance Coefficient (LR) 0.71
10. Recycled Content 85
11. Color White
12. Flame Spread Classification (ASTM E 84, CAN/ULC-S102M) Class A
13. Manufacturer, subject to compliance with requirements of this specification, CertainTeed Ceilings
14. Product Name Gyptone® POINT 11™

Distributed by:

Characteristics, properties or performance of materials or systems manufactured by CertainTeed herein described are derived from data obtained under controlled test conditions. CertainTeed makes no warranties, express or implied, as to their characteristics, properties or performance under any variations from such conditions in actual construction. CertainTeed assumes no responsibility for the effects of structural movement.

NOTICE: The information in this document is subject to change without notice. CertainTeed assumes no responsibility for any errors that may inadvertently appear in this document.

ASK ABOUT ALL OF OUR OTHER CERTAINTEED® PRODUCTS AND SYSTEMS:

ROOFING • SIDING • TRIM • WINDOWS • DECKING • RAILING • FENCE
INSULATION • GYPSUM • CEILINGS • FOUNDATIONS • PIPE

CertainTeed Corporation
P.O. Box 860
Valley Forge, PA 19482

Professional: 800-233-8990
Consumer: 800-782-8777

www.certainteed.com <http://blog.certainteed.com>

© 05/10 CertainTeed Corporation
Code No. CTC-2242