



9/16" Elite Narrow Stab System




9/16" Elite Narrow Stab System

The Elite Narrow Stab System features a slim 9/16" (15mm) face width to enhance design flexibility and to complement finer, contemporary designs. Cross tees incorporate a staked-on end tab to ensure quick installation with optimal tightness.


Elite Narrow Stab System

- Narrow style 9/16" (15mm) face complements modern designs.
- Double web design for lasting durability and strength.
- Stepped-end detail provides a seamless appearance.
- Cross tees utilize stab-in design to maximize strength and flexibility.
- Intermediate duty load bearing capabilities.
- Grid features G30 hot-dipped galvanized steel web construction for corrosion resistance.
- 25% recycled content (20% post-consumer, 5% pre-consumer).
- Available in standard white and black.

Selected Popular Edge Details

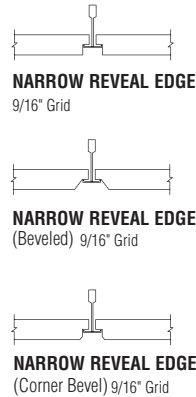

Main Runners

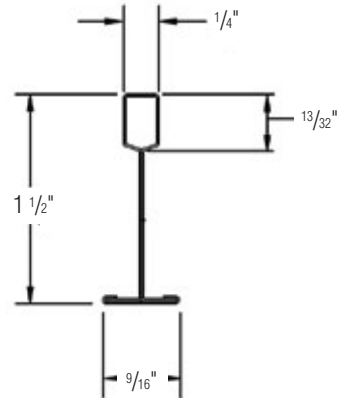

Elite Narrow Stab System

MAIN RUNNER ITEM #	LENGTH	HEIGHT	FACE	METAL THICKNESS	Allowable Load (lbs./lin.ft (kg/m) Hanger Spacing)
					ASTM C635 4' (1220mm)
ES12-12-18	12' (3660mm)	1-1/2" (38mm)	9/16" (15mm)	0.018" (0.46mm)	Intermediate Duty 12.00 (17.90)

Slotted 6" o.c.

CROSS TEE ITEM #	LENGTH	HEIGHT	FACE	METAL THICKNESS
ES2-12-12	2' (610mm)	1-1/2" (38mm)	9/16" (15mm)	0.012" (0.25mm)
ES4-12-12*	4' (1220mm)	1-1/2" (38mm)	9/16" (15mm)	0.012" (0.25mm)
ES4-12-18*	4' (1220mm)	1-1/2" (38mm)	9/16" (15mm)	0.018" (0.46mm)

**Slotted 12" o.c.*

TRADITIONAL WALL ANGLE ITEM #	LENGTH	HEIGHT	FACE	METAL THICKNESS
WA15-15	12' (3660mm)	15/16" (24mm)	15/16" (24mm)	0.018" (0.46mm)
WA15-9	12' (3660mm)	15/16" (24mm)	9/16" (15mm)	0.018" (0.46mm)

SHADOW MOLDING ITEM #	METAL DIMENSIONS	THICKNESS
SM1000	10' x 15/16" x 3/8" x 3/8" x 9/16" (3050 x 24 x 10 x 10 x 15mm)	0.018" (0.46mm)
SM1020	10' x 3/4" x 3/8" x 3/8" x 3/4" (3050 x 19 x 10 x 10 x 19mm)	0.018" (0.46mm)